



# The water cycle from space: Use of satellite data in land surface hydrology and water resource management

William Crosson, Charles Laymon, Clay Blankenship, Maudood Khan

*Universities Space Research Association at National Space Science and Technology Center*

*Huntsville, Alabama, USA*

Ashutosh Limaye

*NASA-Marshall Space Flight Center at National Space Science and Technology Center*

*Huntsville, Alabama, USA*

Brian Hornbuckle and Tracy Rowlandson

*Iowa State University*

*Ames, Iowa, USA*

**Workshop on Space Technology Applications for Socio-Economic Benefits**

**Istanbul, 14-17 September 2010**







# NASA's Earth Science Mission



*...to understand and protect our home planet by using our view from space to study the Earth system and improve prediction of Earth system change.*

## Earth Science Research Foci

- Atmospheric Chemistry and Composition
- Carbon Cycle and Ecosystems
- Climate Variability and Change
- Earth Surface and Interior
- Water and Energy Cycle
- Weather

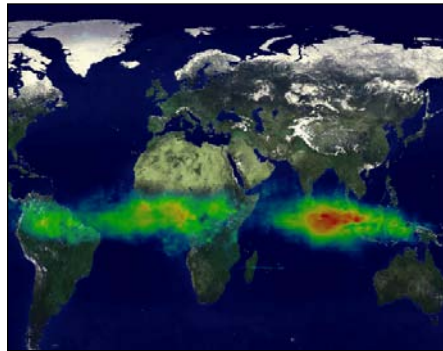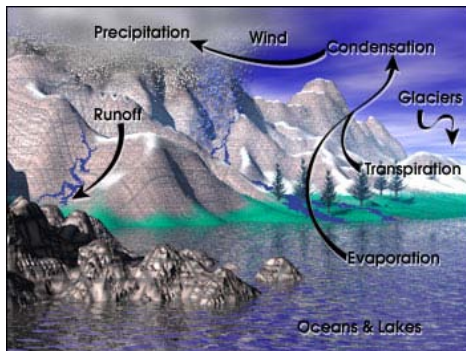

## Earth Science Applications



- Agriculture



- Air Quality



- Climate



- Natural Disasters




- Ecological Forecasting



- Public Health




- Water Resources




- Weather





# NASA's Earth Science Satellite Fleet



**20 Operational Missions**  
**6 In Development**  
**5 Under Study**

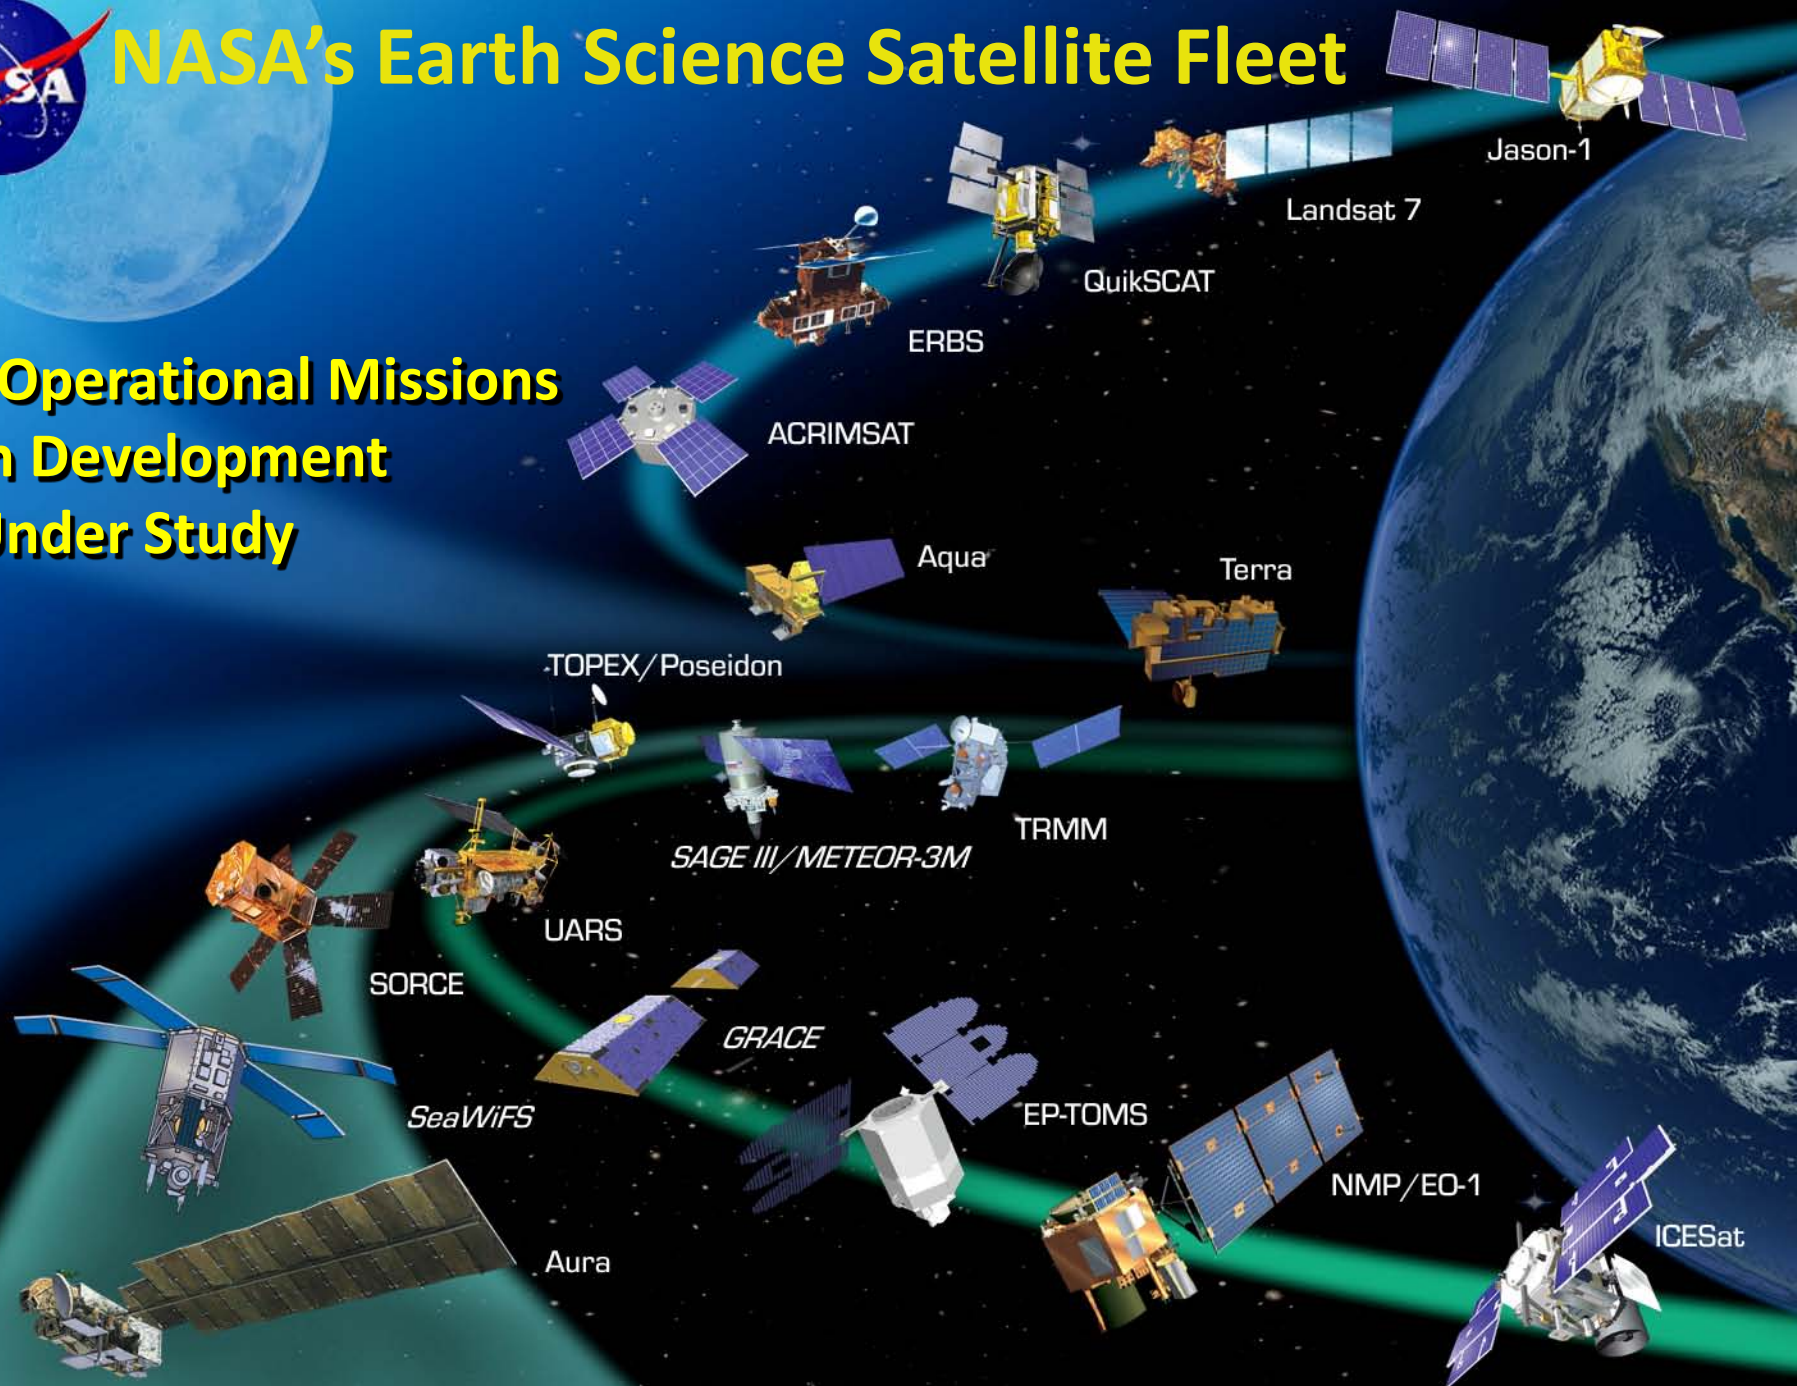

## GRACE

2002-2015+



- Provide detailed measurements of Earth's gravity field
- Retrieve changes in groundwater storage

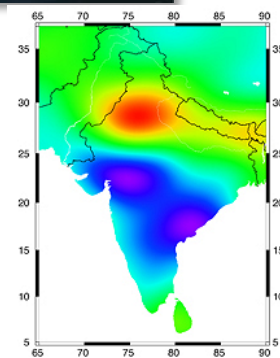

## AMSR-E (NASA-JAXA)

2002-??


- On NASA Aqua satellite
- 6 frequencies, 6.9-89 GHz
- C-band subject to serious RFI; higher frequencies used for soil moisture estimation
- Near-daily coverage

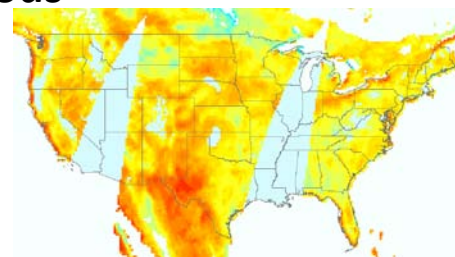

## SMOS (European Space Agency)

2009-??


- L-band imaging radiometer
- Global observation soil moisture and ocean salinity

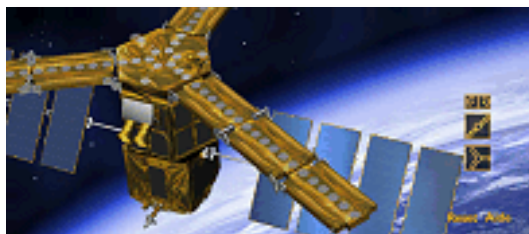

## TRMM (NASA-JAXA)

1997-??

- Radar, imager, VIS/NIR scanner, lightning sensor
- Estimates rainfall from equator to  $\sim 35^\circ$  N/S
- Hourly - monthly rainfall estimates

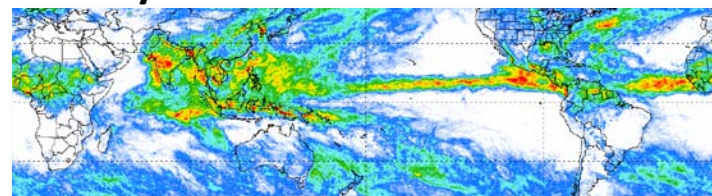




## Aquarius (NASA/Argentina)

*Expected launch 2011*


- L-band radiometer/scatterometer
- Global coverage every 7 days
- Sea surface salinity, sea ice, rain, cloud water
- Map seasonal and inter-annual variations in sea surface salinity



## GPM

*Expected launch 2013*

- International satellite network
- Global measurement of precipitation, its distribution, and physical processes
- Will improve the accuracy of weather forecasts and understanding of climate



## SMAP

*Expected launch 2015*

- L-band radiometer/radar
- Global measurement of surface soil moisture and freeze/thaw state.




## SWOT

*Expected launch 2020*


- Ka-band radar interferometer
- First global survey of Earth's surface water
- Will measure water storage changes in all wetlands, lakes, and reservoirs
- Repeated measurements of water height during floods



- Flood mapping/damage assessment
- Groundwater changes (GRACE mission)
- Precipitation
- Evapotranspiration
- Irrigation
- Lake and reservoir monitoring;  
streamflow forecasting
- Wetland mapping
- Soil moisture

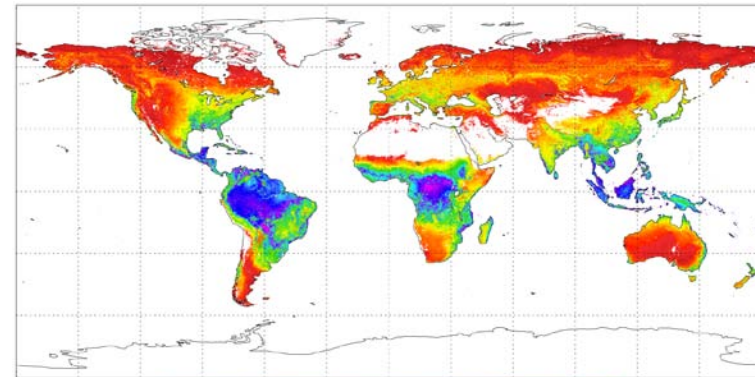

0 250 500 750 1000 1250 1500  
Global Annual MOD16 ET (2000-2006) mm/yr

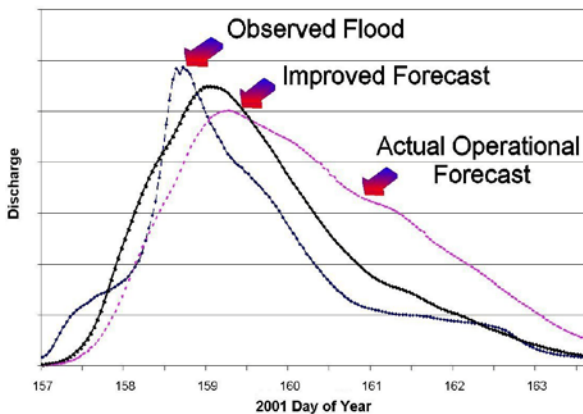


## 1970's-present: Ground-based sensors

- Field experiments use ground-based radiometers, usually mounted on mobile booms
- Monitor temporal changes in soil moisture at a point
- No spatial mapping
- In situ measurements provide excellent validation



## 1980's – present: Airborne sensors


- Airborne radiometers used to map soil moisture at regional scale (~100 km)
- Monitor temporal changes in soil moisture over region via repeated flights
- In situ validation very labor-intensive

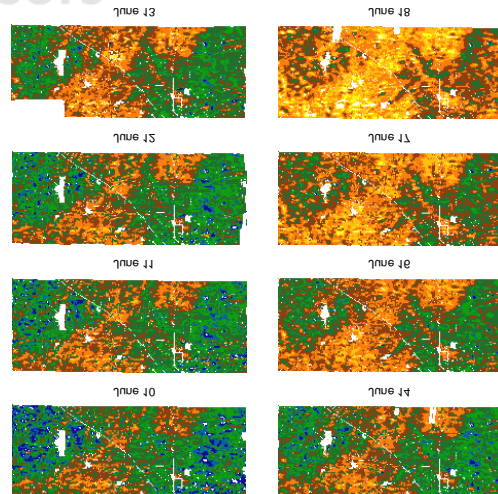




## 2002: AMSR-E

- Measures rainfall, atmospheric water vapor, cloud properties, snow cover, sea ice, sea surface temperature, soil moisture

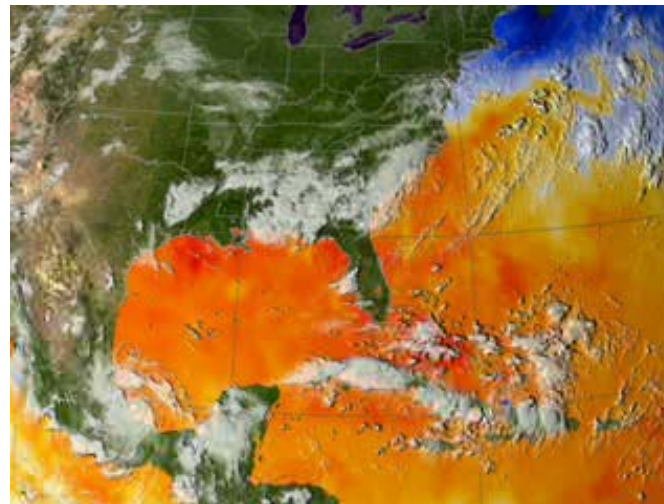

## Future: L-band satellite sensors (SMOS, SMAP, Aquarius)

- Provide soil moisture estimates globally except over densely vegetated regions
- Sensitive to soil moisture in top 3-5 cm
- Algorithms for mitigation/elimination of Radio Frequency Interference (RFI) being developed

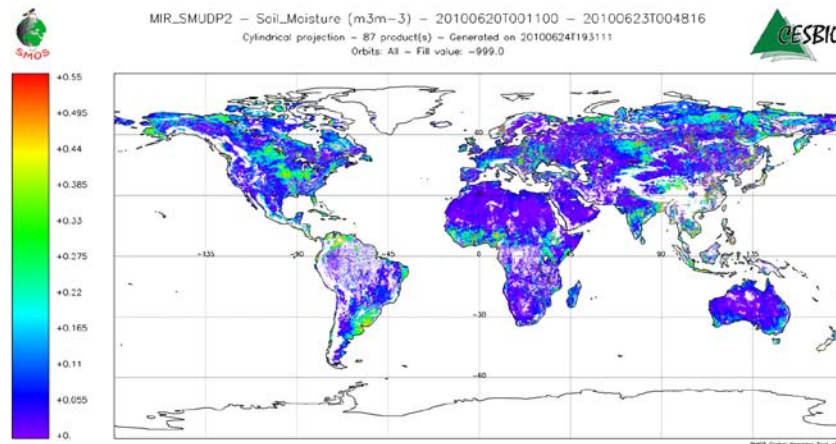

- Estimation of soil moisture using remote sensing typically relies on microwave radiometers (passive) and radars (active).
  - Active RS gives better spatial resolution.
  - Passive RS is more sensitive to soil moisture with fewer confounding factors.
- Lower frequencies (L-band) allow more robust retrievals but introduce engineering problems (larger antenna required to achieve same spatial resolution as higher frequencies).

Band	Frequency (GHz)	Wavelength (cm)	Penetration depth (cm)	Sensitivity to vegetation	RFI contamination
L	1.4	21.3	3-5	Moderate	Moderate
C	6.9	4.3	1.0 – 1.5	High	Very high
X	10.7	2.8	0.5 - 1.0	Very high	High

